


Nylon Machine Screws - Thumb Slot

Hi-Q Nylon screws are tough, light, durable and corrosion resistant in normal temperatures


| Part Number | Thread Size | Thread Length |
|---------------|-------------|---------------|
| 08-PNS3-06TS | M3 | 6 |
| 08-PNS3-10TS | M3 | 10 |
| 08-PNS3-16TS* | M3 | 16 |
| 08-PNS4-06TS* | M4 | 6 |
| 08-PNS4-10TS | M4 | 10 |
| 08-PNS4-20TS | M4 | 20 |
| 08-PNS5-10TS* | M5 | 10 |
| 08-PNS5-12TS* | M5 | 12 |
| 08-PNS5-16TS | M5 | 16 |
| 08-PNS5-20TS | M5 | 20 |
| 08-PNS6-10TS | M6 | 10 |

| Part Number | Thread Size | Thread Length |
|----------------|-------------|---------------|
| 08-PNS6-16TS | M6 | 16 |
| 08-PNS6-20TS | M6 | 20 |
| 08-PNS6-25TSV* | M6 | 25 |
| 08-PNS6-45TS | M6 | 45 |

Material: Nylon 6/6
* = Available in black
Thread sizes are in millimetres
More sizes available



Thumb Slot



| Thread Size | H | A |
|-------------|-----|-----|
| M3 x 0.5 | 5.5 | 8 |
| M4 x 0.7 | 7 | 9.7 |
| M5 x 0.8 | 7.7 | 10 |
| M6 x 1.0 | 7.7 | 12 |

Nylon Machine Screws - Grub Slot

Hi-Q Nylon screws are tough, light, durable and corrosion resistant in normal temperatures


| Part Number | Thread Size | Thread Length |
|---------------|-------------|---------------|
| 08-PNS4-03GS | M4 | 3 |
| 08-PNS4-04GS | M4 | 4 |
| 08-PNS4-06GSV | M4 | 6 |
| 08-PNS4-08GS | M4 | 8 |
| 08-PNS4-10GS | M4 | 10 |
| 08-PNS4-12GS | M4 | 12 |
| 08-PNS4-16GS | M4 | 16 |
| 08-PNS4-20GS | M4 | 20 |
| 08-PNS4-25GS | M4 | 25 |
| 08-PNS4-30GS | M4 | 30 |
| 08-PNS4-35GS | M4 | 35 |
| 08-PNS4-40GS | M4 | 40 |
| 08-PNS5-06GS | M5 | 6 |
| 08-PNS5-08GS | M5 | 8 |
| 08-PNS5-10GS | M5 | 10 |
| 08-PNS5-12GS | M5 | 12 |
| 08-PNS5-16GS | M5 | 16 |
| 08-PNS5-20GS | M5 | 20 |
| 08-PNS5-25GS | M5 | 25 |
| 08-PNS5-30GS | M5 | 30 |
| 08-PNS5-40GS | M5 | 40 |

| Part Number | Thread Size | Thread Length |
|---------------|-------------|---------------|
| 08-PNS6-05GS | M6 | 5 |
| 08-PNS6-08GS | M6 | 8 |
| 08-PNS6-10GS | M6 | 10 |
| 08-PNS6-12GS | M6 | 12 |
| 08-PNS6-16GS | M6 | 16 |
| 08-PNS6-20GS | M6 | 20 |
| 08-PNS6-25GS | M6 | 25 |
| 08-PNS6-45GS | M6 | 45 |
| 08-PNS6-75GS | M6 | 75 |
| 08-PNS8-08GS | M8 | 8 |
| 08-PNS8-10GS | M8 | 10 |
| 08-PNS8-16GS | M8 | 16 |
| 08-PNS8-20GS | M8 | 20 |
| 08-PNS8-25GS | M8 | 25 |
| 08-PNS8-30GS | M8 | 30 |
| 08-PNS8-35GS | M8 | 35 |
| 08-PNS8-50GS | M8 | 50 |
| 08-PNS10-10GS | M10 | 10 |
| 08-PNS10-13GS | M10 | 13 |
| 08-PNS10-16GS | M10 | 16 |
| 08-PNS10-20GS | M10 | 20 |

Material: Nylon 6/6
Thread sizes are in millimetres
More sizes available



Grub Slot




| Thread Size | A | J | T |
|-------------|-----|-----|-----|
| M4 x 0.7 | 2 | 0.6 | 0.7 |
| M5 x 0.8 | 3.3 | 0.9 | 1.3 |
| M6 x 1.0 | 4.1 | 1 | 1.5 |
| M8 x 1.25 | 5.1 | 1.6 | 2.2 |
| M10 x 1.5 | 6.6 | 1.5 | 2.2 |
| M12 x 1.75 | 8.4 | 1.8 | 2.6 |

Nylon Machine Screws - Socket Hex / Socket Head Cap


Hi-Q Nylon screws are tough, light, durable and corrosion resistant in normal temperatures

| Part Number | Thread Size | Thread Length |
|----------------|-------------|---------------|
| 08-PNS8-25SHCM | M8 | 25 |
| 08-PNS8-50SHCM | M8 | 50 |
| 08-PNS10-13SCH | M10 | 13 |
| 08-PNS10-25SCH | M10 | 25 |
| 08-PNS10-30SCH | M10 | 30 |
| 08-PNS10-35SCH | M10 | 35 |
| 08-PNS10-50SCH | M10 | 50 |

Material: Nylon 6/6
Thread sizes are in millimetres
More sizes available



Hex Socket

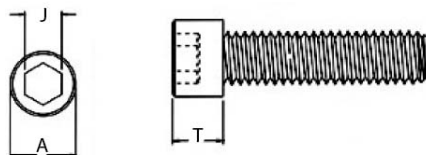

| Thread Size | A | J | T |
|-------------|----|---|-----|
| M8 x 1.25 | 13 | 6 | 8 |
| M10 x 1.5 | 16 | 8 | 9.9 |